



CITY OF REDONDO BEACH
PUBLIC WORKS DEPARTMENT
ENGINEERING SERVICES DIVISION

ADDENDUM NO. 2

Date: October 18, 2016
To: All Bidders
From: City Engineer
Subject: **Addendum No. 2- Ensenada Parkette Improvements Project, Job No. 30620**

The following changes to the contract documents for the above subject project shall be incorporated into the plans and specifications of said project and made part thereof:


1. The total thickness of Vitriturf rubberized play surfacing is 3.5" (0.5" wearing course and 3" base mat) for the specified play equipment or 4" (0.5" wearing course and 3.5" base mat) for the substituted GameTime's Cosmix Climber.
2. There are total of two 6' benches to be installed for this project.
3. Addendum No. 1, Item 12: Revise "Drawings: Sheet 7, Detail F: The 3" perforated PVC pipe shall connect to existing catch basin.....at old location" to read "Drawings: Sheet 7, Detail F: The 3" perforated PVC pipe shall connect to existing **area drain**.....at old location".
4. There are two existing area drains as shown on plans: the one on Goodman Avenue side is to be replaced in kind including the drainage piping system to existing street catch basin and the 3" perforated PVC drain pipe of the new retaining wall is connected to this area drain system; and the one on Armour Lane side is to be replaced in kind, relocated in the planter, and connected to existing drainage piping system at its old location (shown in new concrete slab area). The play area drainage system shall connect to the relocated, replaced in kind area drain on Armour Lane side. A copy of existing area drain system detail is attached for reference.
5. Addendum No. 1, Drawing 4R: The score lines (S.L.) shall be 1/8" wide and 1" deep sawcut and the expansion joints (E.J.) shall be per Key Note 10.
6. Addendum No. 1, Drawing 4R, Detail A- Section A-A: Revise Note "New 6" concrete slab with #4 @ 12" O.C. each way" to read "New **12"** concrete slab with **#5 @ 12"** O.C. each way"
7. Contractor is not responsible for securing portable tables and benches to concrete slab.

8. The parkette monument sign footing depth is 1'-10".

9. All PVC pipes shall be schedule 40 minimum, unless otherwise noted.

Acknowledgment of this Addendum shall be executed and attached to your Bid Proposal form. Failure to do so shall result in your bid being rejected.


CITY OF REDONDO BEACH

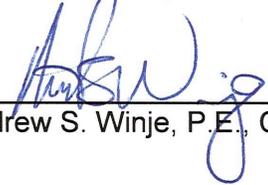By:  _____
Andrew S. Winje, P.E., City Engineer


ACKNOWLEDGED

Bidder's Name: _____

Authorized Representative: _____ Date: _____

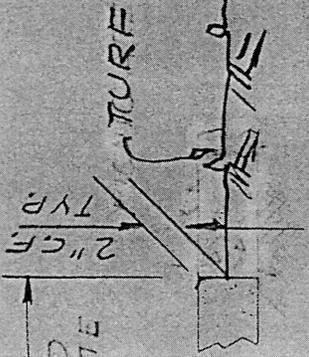


SECTION C
STEP-UP
SCALE

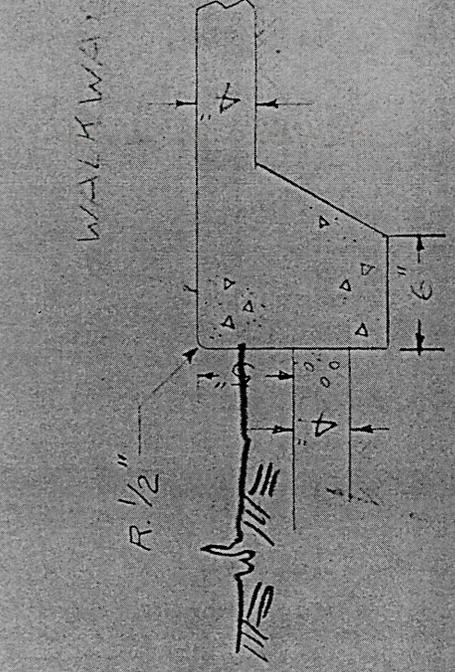


PICNIC AREA

SECTION G
WALKWAY STEP-DOWN
NO SCALE

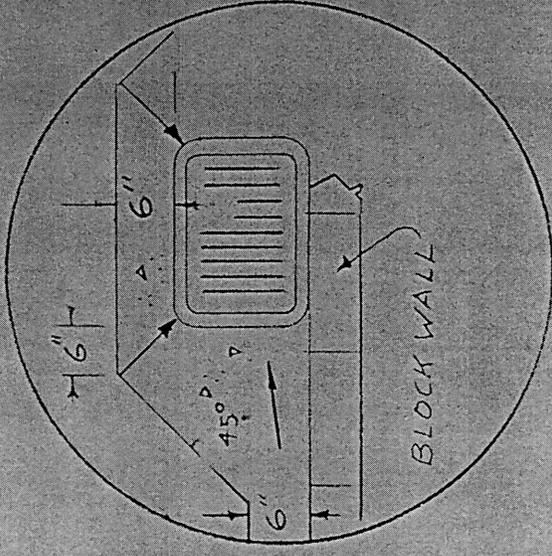

DRAIN DETAIL

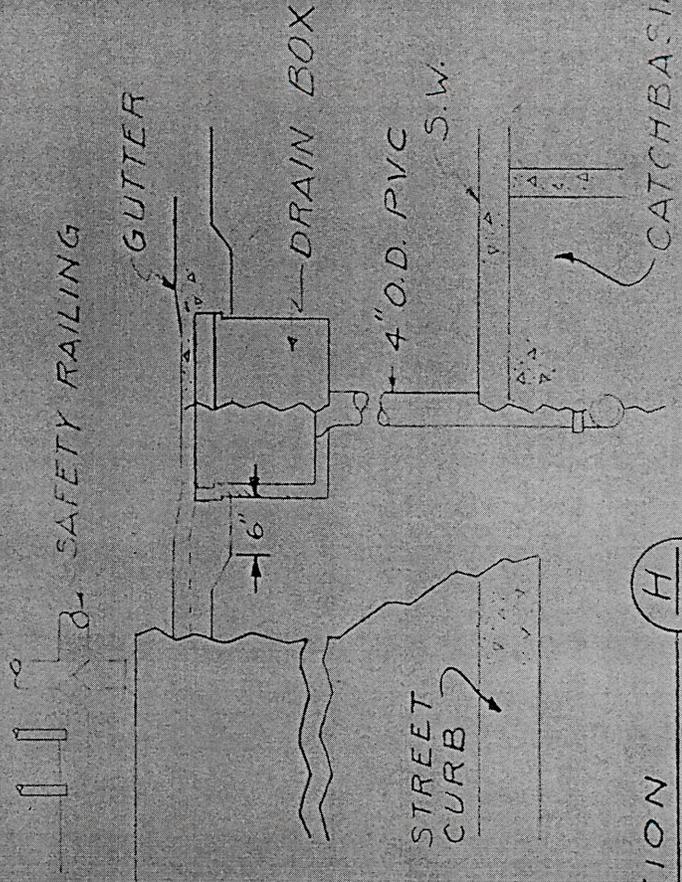

SECTION H
DRAINAGE SYSTEM
NO SCALE

NOTE:
TOP OF GRATING TO
BE SET .25' BELOW
SURROUNDING GUTTER.